


Decorative Fronts Dimensions and Framing

MEZZO60ST

FRONT DIMENSIONS

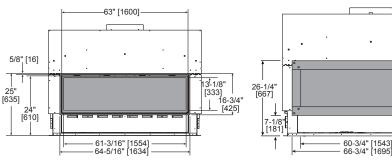

Loft Forge Front

Rectangular holes on

must be exposed.

finishing material on

overlap fit method

bottom of access panel


ONLY approved for O"-1"

Clean Face Trim


- Rectangular holes on bottom of access panel should be covered.
- Approved for 0"-4" finishing material on inside fit method
- If finishing materials are O-1" thick, the outer trim ring should be adjusted out so that the trim ring overlaps the finishing material. This is intended to provide the cleanest look.
- If finishing materials are 1-4" thick, install the trim ring all the way in. Finishing materials may not extend past the outside edge of the trim ring.

FINISHED OPENING DIMENSIONS


HEATEGLO

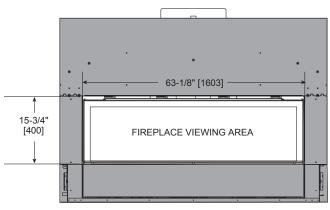

Inside Fit Method (Clean Face Trim)

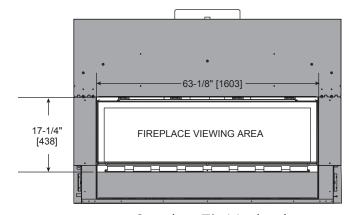


Overlap Fit Method (Loft Forge, Quattro)

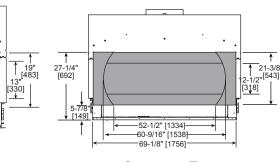


Quattro Front

- Rectangular holes on bottom of access panel <u>must be exposed</u>.
- ONLY approved for 0"-1" finishing material on overlap fit method


APPLIANCE LOCATION

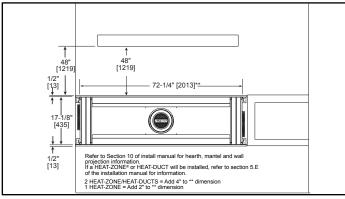


WALL PENETRATION

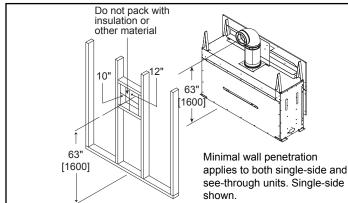

MANTEL PROJECTIONS - COMBUSTIBLE

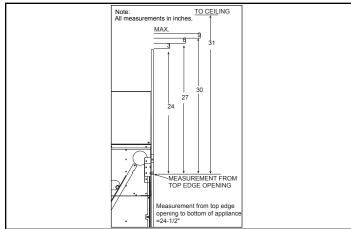


MANTEL PROJECTIONS - NON-COMBUSTIBLE

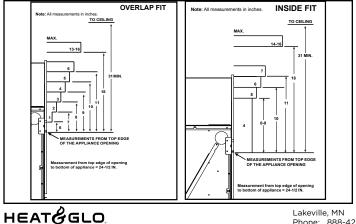


No one builds a better fire


FRAMING DIMENSION

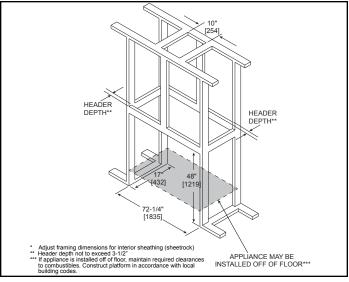

CLEARANCES TO COMBUSTIBLES

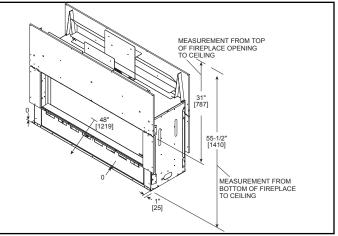

MANTEL LEG/WALL PROJECTIONS

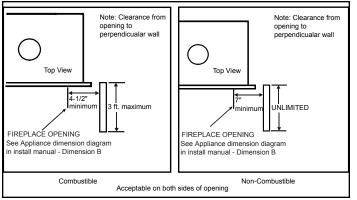

 PRODUCT LISTING CODES

 US
 ANSI Z21.88-2014

 CAN
 CSA 2.33-2014

 CMN BURGE
 UL307B

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Additional information can be found online at www.heatnglo.com

