ARE YOU READY FOR INSTALLATION?

In order to improve our service level and provide our clients with the best timing to schedule their installations, please take note of the following common issues and challenges for completing installations on schedule.

NOT READY

Driveway not ready

NOT READY

No electrical for dishwasher

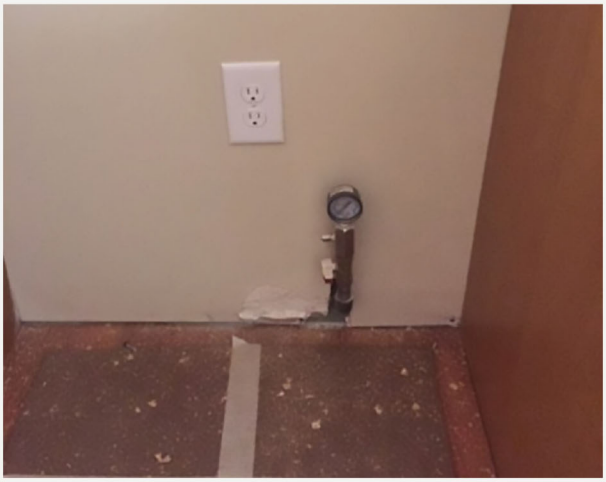

NOT READY

A pressure gauge needs to be removed

NOT READY

A vent needs to be centered

RHOME
CONSTRUCTION RESOURCES, LLC

ARE YOU READY FOR YOUR INSTALLATION?

NOT READY

Other trades in the way

NOT READY

A vent pipe not centered on cabinets, electrical not centered on cabinets

NOT READY

Microwave vent pipe not installed centered

NOT READY

Platform must be installed in oven cavity

PRODUCTS • CONSULTATIONS • CUSTOMIZATION

For more information visit: www.builderspecialties.net

In order to improve our service level and provide our clients with the best timing to schedule their installations, please take note of the following common issues and challenges for completing installations on schedule.

NOT READY

A receptacle needs to be installed

NOT READY

Floors not finished - counter tops not installed yet

NOT READY

No drain installed for dishwasher

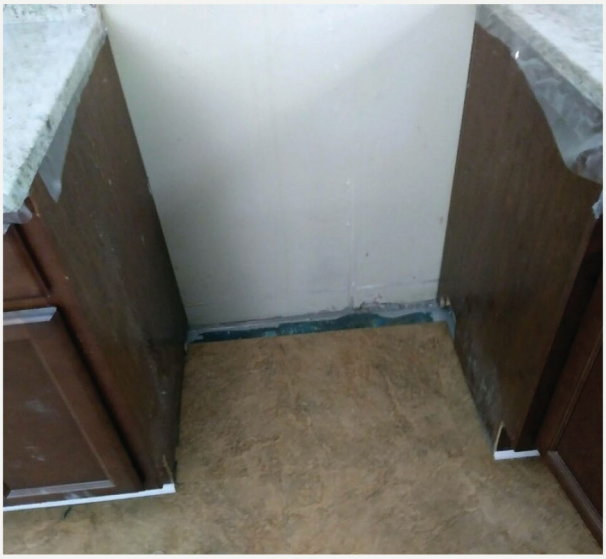

NOT READY

No gas or electrical source installed for range

INSTALLATION • SERVICE • COMMMUNITY

For more information visit: www.builderspecialties.net

RHOME
CONSTRUCTION RESOURCES, LLC

To reduce bad trips and improve our service level to our clients, please help with the following:

ACCESS TO HOUSE

- Need driveways and sidewalks poured
- Need steps installed where applicable

ENTRY TO HOUSE

- House needs to be unlocked or lockbox code provided

UTILITIES IF WE ARE INSTALLING

- Electrical needs to be turned on
- Electrical outlets need to be in correct location
- Water needs to be turned on before connecting any plumbing
- Venting for hoods and over the range microwaves need to be in correct location
- Water valve box for refrigerator must be installed in correct location
- Gas line with shut-off valve must be in correct location
- Electrical conduit needs to be removed to acheive a flush look with the cabinets-dishwasher

CUTOUTS

- Oven cutouts need to be correct
- Platform for oven to rest must be installed
- Refrigerator openings must be correct
- Range opening must be correct
- Countertop opening must be correct for cooktop

OTHER TRADES

- Floors need to be finished
- Tile needs to be installed prior to hood installation
- Crown molding needs to be cut for chimney hood installation
- Countertops need to be installed

Distribution Center: 6340 Best Friend Road • Norcross • GA • 30071 • 770.255.1400
Buckhead Showroom: 761 D Miami Circle • Atlanta • GA • 30324 • 404.233.6131
Panama City Showroom: 1217 Harrison Ave • Panama City • FL • 32401 • 850.769.7043
Miramar Beach Showroom: 10859 Emerald Coast Pkwy West • Suite 203 • Miramar Beach • FL • 32550 • 850.650.9092
www.builderspecialties.net